

27 HP¹ GTV760

Industrial OHVI® Engine
GTV760
Model #: 0051850
2006 MSRP \$1,610.00



SPECIFICATIONS


- Vertical Shaft
- V-Twin Cylinder
- Air-Cooled
- OHVI Industrial Design

Displacement	763 cc
Bore	90 mm / 3.54"
Stroke	60 mm / 2.36"
Compression Ratio	7.5:1
Lubrication	Full Pressure
Oil Capacity	2.3 L / 2.43 qts.
Weight	121 lbs.

STANDARD FEATURES

- Full Pressure Lubrication (Automotive Type Gerotor Oil Pump)
- Automotive Type Oil Filter
- Engine Oil Cooler, Utilizes High Velocity Flywheel Fan Air
- Low Oil Pressure Switch, Normally Closed (Not Connected)
- High Torque Industrial 12V Solenoid Shift Electric Starter
- Cast Iron Liners
- Large Hardened Crankshaft Bearing Journals
- Special Alloy Sleeve PTO and Flywheel End Bearings
- Hardened Camshaft with Helical Cut Gears
- Hardened Valve and Valve Seats
- Cam Ground Pistons Skirt (Elliptical)
- Chrome Compression Ring
- 3 Piece Automotive Type Oil Ring
- Electronic Ignition
- 2-Barrel Carburetor, Fuel Pump, Vacuum Operated
- Heavy Duty X-Torq® Governor with Thrust Needle Bearing
- Fuel Shut-off Solenoid
- Industrial Multi-Stage Air Cleaner
- Closed Loop Breather System
- Fill Tube with Dipstick
- Rotating Flywheel Cooling Air Screen
- Removable Fixed Flywheel Debris Screen
- Engineered High Volume Flow Muffler, Tube Outlet
- Fuel Filter, No-Tank
- 12 V, 20 Amp Regulated Charging System
- Wire Harness with Packard Connector
- Remote Throttle Control, Remote Choke Control
- 1 1/8" diameter Crank

PERFORMANCE CURVE

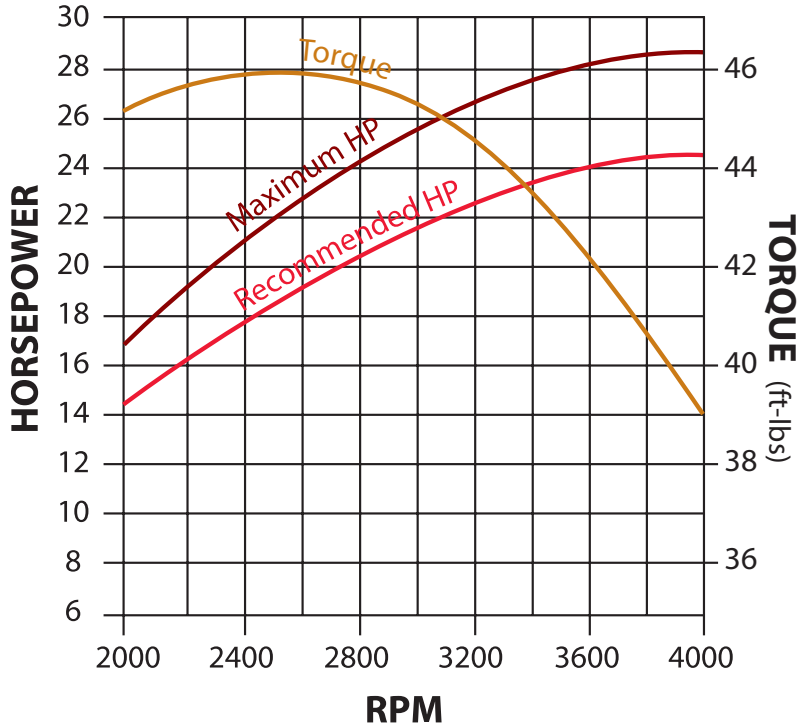

¹ Per SAE J1995

GENERAC®
POWER SYSTEMS, INC.

